



Aluminum Radar Reflector Topmark



Light

Aluminum Modular Mast


Integrated Battery Container

Solar Panels



Polyethylene Floats

4 x Lifting Points

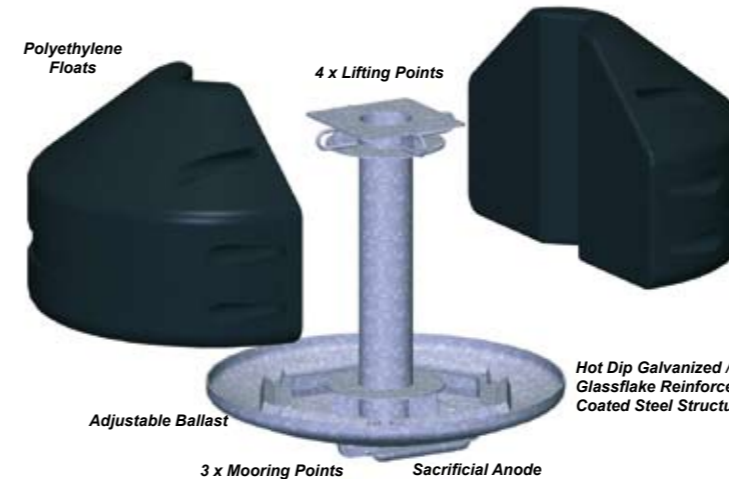


Hot Dip Galvanized / Glassflake Reinforced Coated Steel Structure

Adjustable Ballast

3 x Mooring Points

Sacrificial Anode

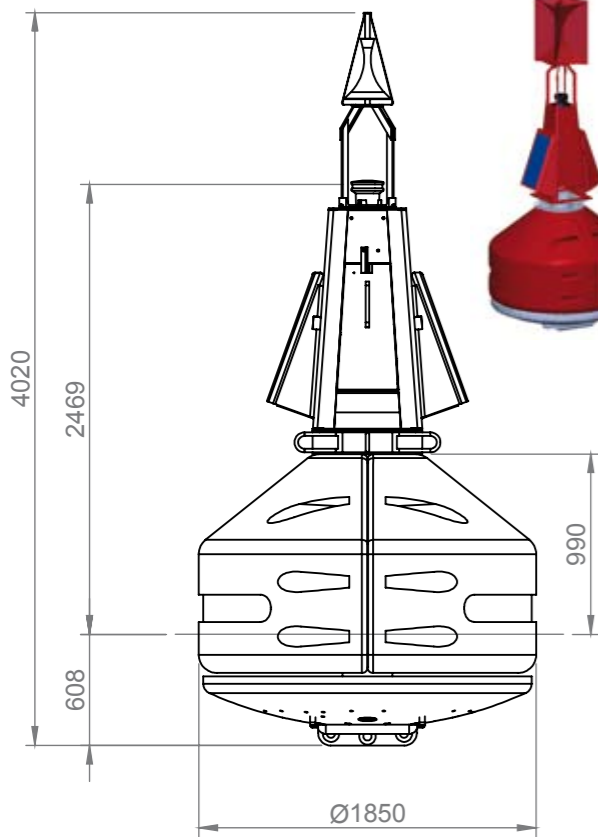

Exploded view of a JET 2500 FB PF2

Anchor elements (shackles, chains, swivels, sinkers) are available in mooring device section in catalogue

EQUIPMENTS	
MAST	Coated Aluminium marine grade
STRUCTURE	Hot Dip Galvanized or Coated Steel
FLOATS	Medium density polyethylene 15 Years UV protected (PEMD UV-15)

SPECIFICATIONS	
APPLICATIONS	Offshore, Coastal, Estuary, River, Grouding
DIAMETER	1.85 m
OVERALL HEIGHT	5 m
BUOY WEIGHT	750 kg without ballast
BALLAST WEIGHT-ADJUSTABLE	300 kg
FOCAL PLANE	up to 2 m
DRAUGHT	0.85 m
MAXIMUM CURRENT*	8 knots
VISIBLE SURFACE	Up to 4 m ²
BUOYANCY (KG/CM)	26 Kg

*According to mooring line designed for site conditions