

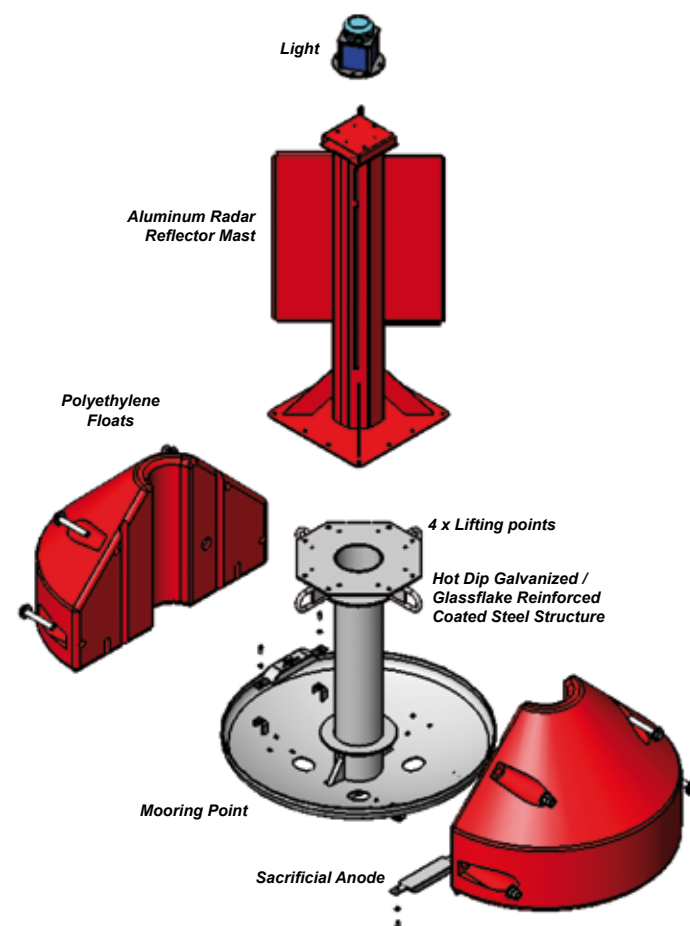
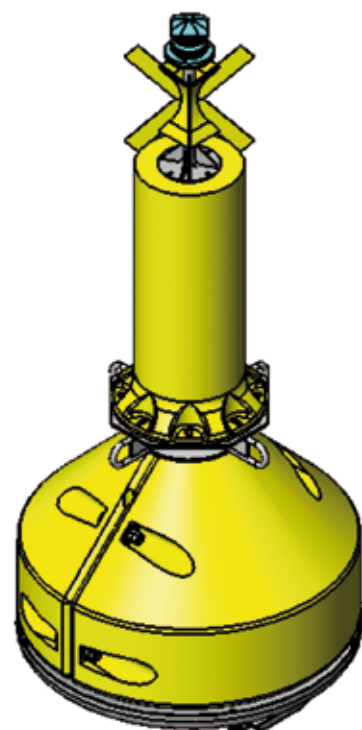


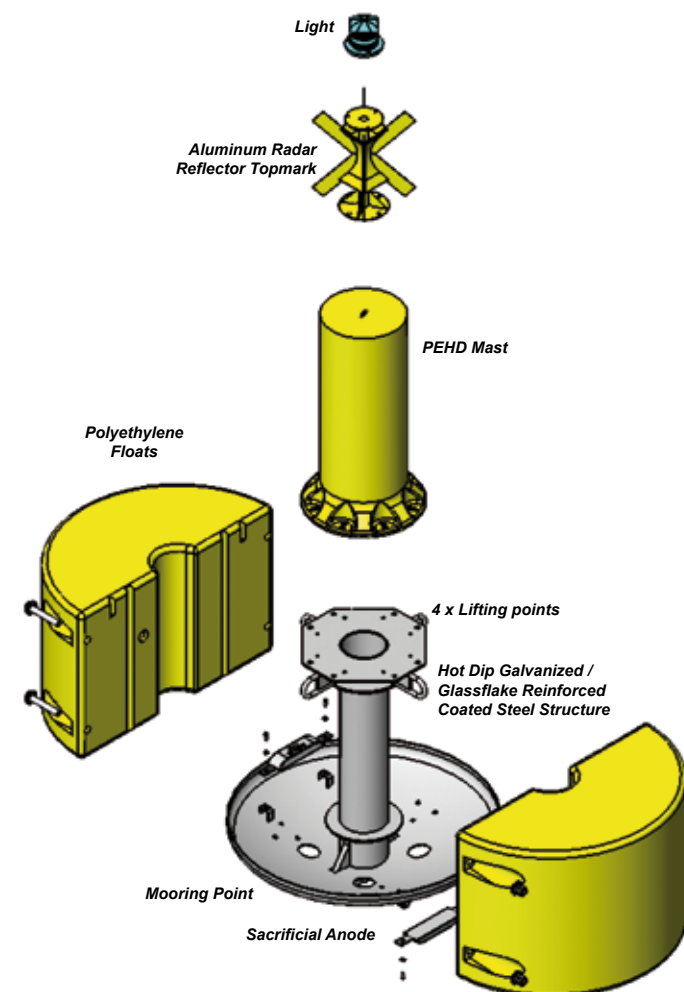


Anchor elements (shackles, chains, swivels, sinkers) are available in mooring device section in catalogue

Exploded view of a FB 1241

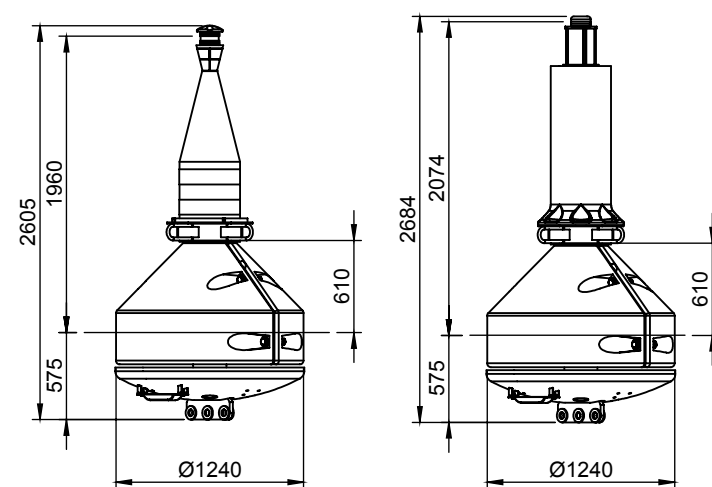

Anchor elements (shackles, chains, swivels, sinkers) are available in mooring device section in catalogue

Exploded view of a FB 1242

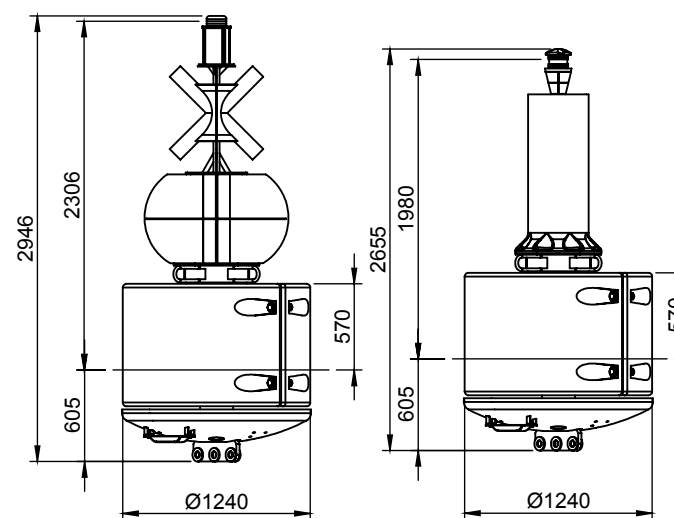

EQUIPMENTS	
MAST	Medium Density Polyethylene 15 Years UV protected (PEHD UV-15) / Coated Aluminium marine grade
STRUCTURE	Hot Dip Galvanized or Coated Steel
FLOATS	High and medium density polyethylene 15 Years UV protected (PEHD UV-15)

SPECIFICATIONS	
APPLICATIONS	Offshore, Coastal, Estuary, Grouding
DIAMETER	1.24 m
OVERALL HEIGHT	3.1 m
BUOY WEIGHT	260 kg without ballast
BALLAST WEIGHT-ADJUSTABLE	150 kg
FOCAL PLANE	up to 2.4 m
DRAUGHT	0.6 m
MAXIMUM CURRENT*	6 knots
VISIBLE SURFACE	Up to 1.3 m ²
BUOYANCY (KG/CM)	12 Kg

*According to mooring line designed for site conditions

EQUIPMENTS	
MAST	Medium Density Polyethylene 15 Years UV protected (PEHD UV-15) / Coated Aluminium marine grade
STRUCTURE	Hot Dip Galvanized or Coated Steel
FLOATS	High and medium density polyethylene 15 Years UV protected (PEHD UV-15)

SPECIFICATIONS	
APPLICATIONS	Offshore, Coastal, Estuary, Grouding
DIAMETER	1.24 m
OVERALL HEIGHT	3.1 m
BUOY WEIGHT	270 kg without ballast
BALLAST WEIGHT-ADJUSTABLE	300 kg
FOCAL PLANE	up to 2.5 m
DRAUGHT	0.6 m
MAXIMUM CURRENT*	6 knots
VISIBLE SURFACE	Up to 1.5 m ²
BUOYANCY (KG/CM)	12 Kg

*According to mooring line designed for site conditions