



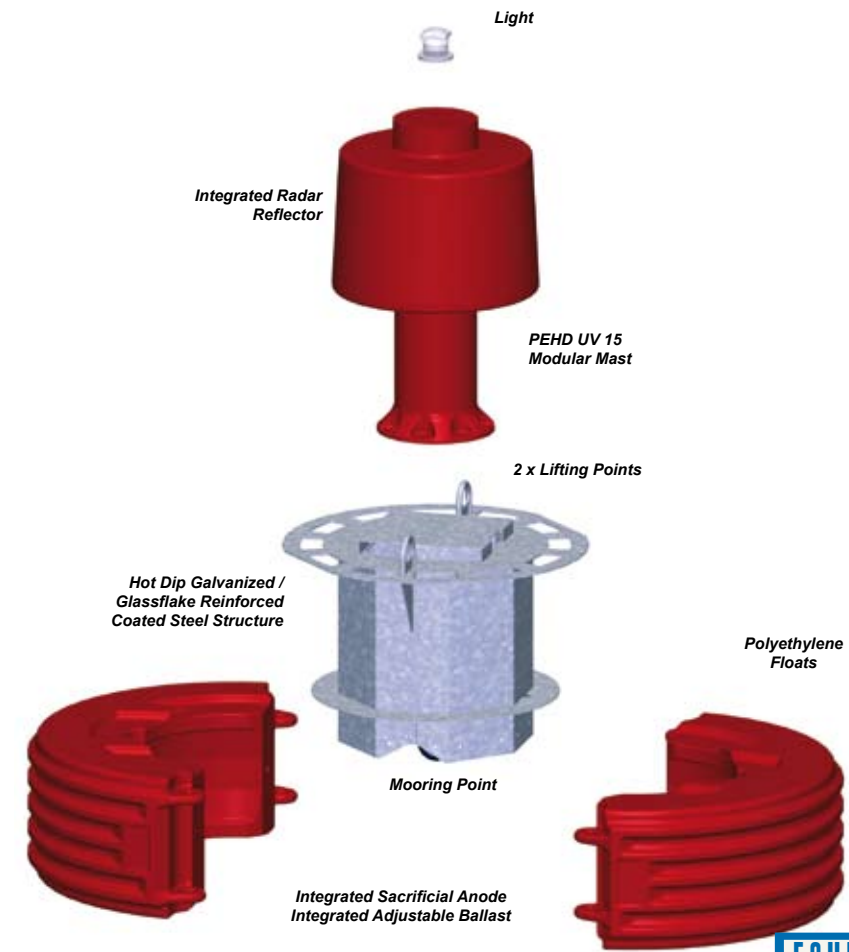

Exploded view of a JET 1400

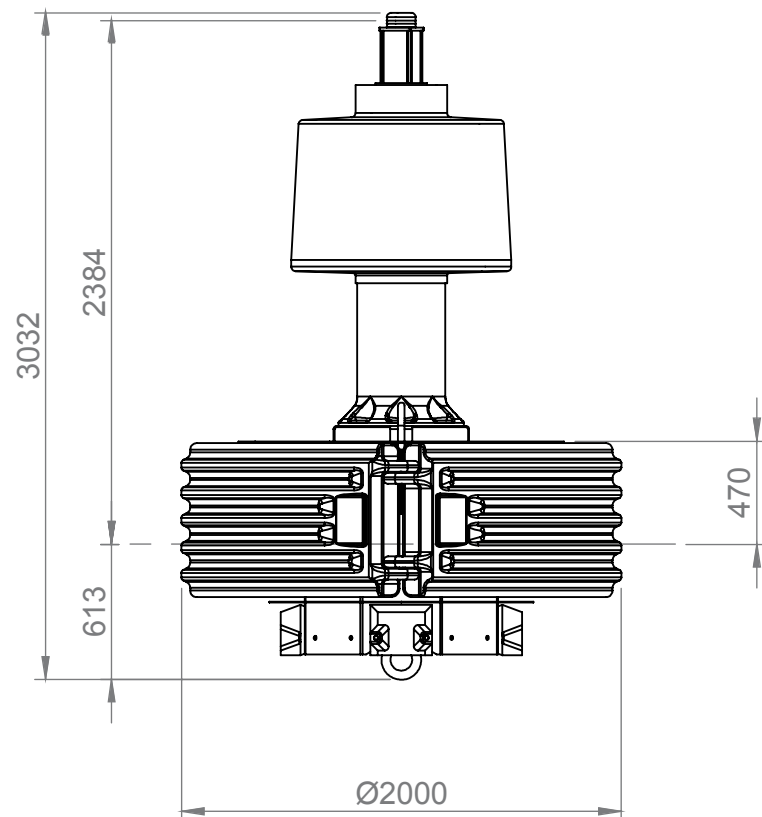

Optional filling of Floats with polyurethane, polystyrene or other materials as specified by customer

Anchoring elements (shackles, chains, swivels, sinkers) are available in mooring device section in catalogue



EQUIPMENTS		MOBILIS
MAST	Medium Density Polyethylene 15 Years UV protected (PEHD UV-15) / Coated Aluminium marine grade	
STRUCTURE	Hot Dip Galvanized or Coated Steel	
FLOATS	High and medium density polyethylene 15 Years UV protected (PEHD UV-15)	

SPECIFICATIONS		MOBILIS
APPLICATIONS	Offshore, Coastal	
DIAMETER	2 m	
OVERALL HEIGHT	3 m	
BUOY WEIGHT	500 kg without ballast	
BALLAST WEIGHT-ADJUSTABLE	8x35 kg	
FOCAL PLANE	up to 2.3 m	
DRAUGHT	0.70 m	
MAXIMUM CURRENT*	6 knots	
VISIBLE SURFACE	up to 2 m ²	
BUOYANCY (KG/CM)	24 Kg	

*According to mooring line designed for site conditions