

LDR 155 EX

Photocell

LDR 155 EX is an independent photocell that can be installed together with Sabik LED 155 EX and LED 350 EX lanterns. The photocell is used if a central fotocell is needed to control several lanterns simultaneously.


- ATEX category Zone 1 and Zone 2
- Switch on and off levels for all connected lanterns can be adjusted with Sabik Mk2 E programmer from the »master« lantern
- Corrosion resistant aluminium housing
- Maintenance free design
- As standard delivered with a 6 m cable





Design
Robust maintenance free construction.



Installation
The bottom plate of the LDR 155 EX supports installation on structure using 3 x M12 bolts or 4 x M12 bolts on a 200 mm radius. The mounting holes are galvanic isolated with plastic isolators. PTFE breathing vent for pressure release.



Bird spikes
Delivered with stainless steel bird spikes.

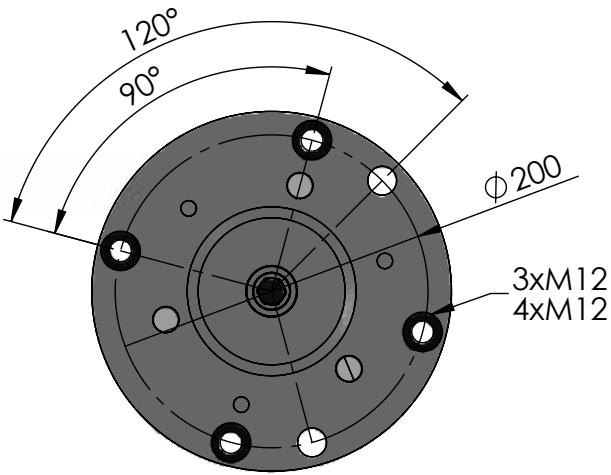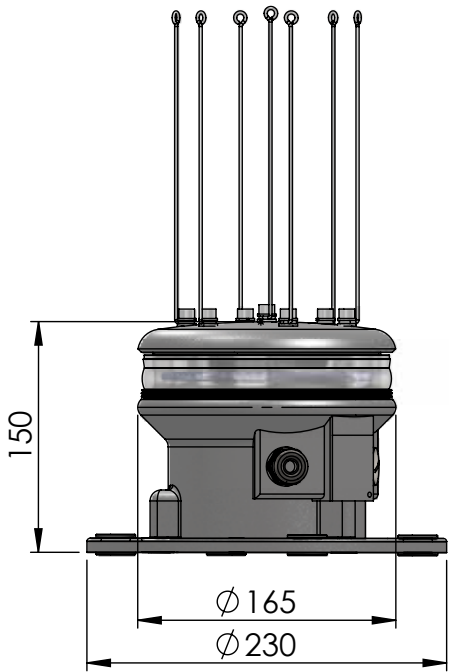

Main Technical Specification

Body material	Corrosion resistant Aluminium
Degree of protection	IP 66
Weight	3 kg
Temperature range	-40°...+60°C
Certificate	ATEX (pending)